


C2600 Door Closer

**ADJ Model:
C2625**

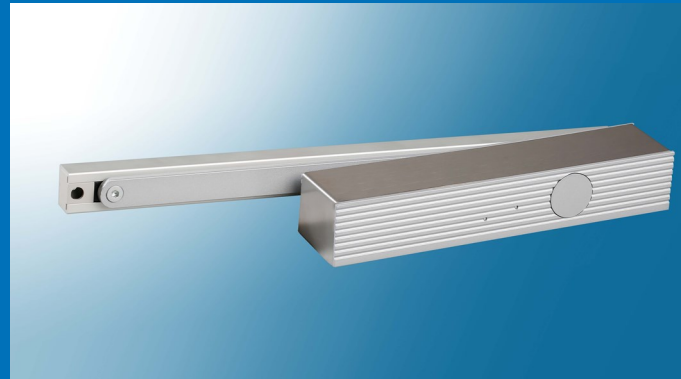

MAAX C2600 Series door closer is designed to provide higher efficiency with the aesthetics of track type door closer. The innovative cam-action design provides strong closing force and control at the latch position while offering much lower opening resistance which makes the door very easy to open. The C2600 closer is an ideal solution for large sized door openings in institutional and commercial applications including hospitals, universities and office buildings.

STANDARD FEATURES


- UL/cUL Listed for 3 hours fire rating
- UL 10C positive pressure
- Adjustable model: C2325 (ADJ 2-5)
- Aluminum body and sliding arm track
- Efficient cam and roller design
- Closer body can be installed on the door or on the frame head
- Non handed installation
- Maximum opening 160° (size 2) to 130° (size 5)
- Door thickness 1 3/4" (44mm) minimum
- Adjustable sweep and latching speeds
- Adjustable backcheck (BC)
- Finish: (ALUM) Aluminum
- Warranty: Limited 5 years

OPTIONAL FEATURES

- Delayed action (DA)
- Hold open track (for non fire rated doors)




DIMENSIONS

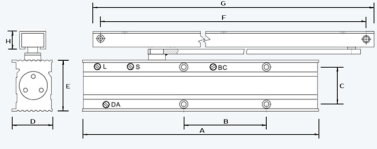

(A)	11 1/4" (286mm)
(B)	3 15/16" (100mm)
(C)	1 3/4" (45mm)
(D)	1 15/16" (49mm)
(E)	2 1/2" (62mm)
(F)	16 7/8" (429mm)
(G)	18 1/8" (460mm)
(H)	7/8" (21mm)

INSTALLATIONS

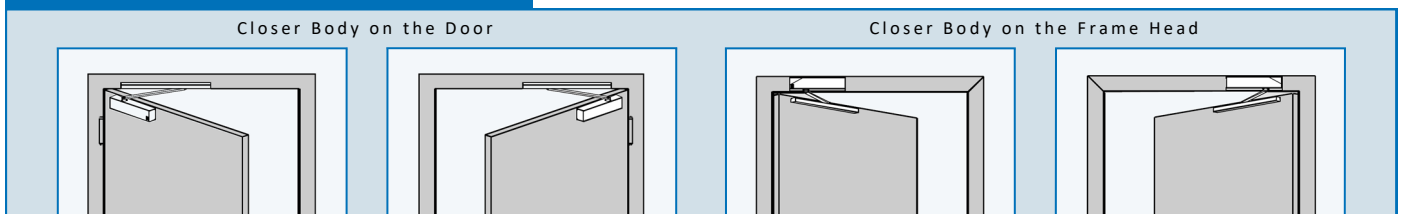

SELECTION GUIDE

Closer Size	Maximum Door Width			Maximum Door Weight
	Interior Door	Exterior Door (Inswing)	Exterior Door (Outswing)	
2	34" (864mm)	N/A	N/A	25-45 (KGS)
3	40" (1016mm)	30" (762mm)	36" (914mm)	45-65 (KGS)
4	46" (1168mm)	36" (914mm)	42" (1067mm)	65-85 (KGS)
5	52" (1321mm)	42" (1067mm)	46" (1168mm)	85-120 (KGS)