

C5000 Door Closer

Sized Models:
C5030, C5040, C5050

Adjustable Models:
C5140, C5150, C5360, C5160



MAAX C5000 Series standard duty door closers are constructed using high performance materials combined with smaller body design. This economic closer offers proven quality, flexibility and reliability. The C5000 closer is ideal for interior and exterior doors of most common applications including offices, hotel guest rooms, storefronts, restaurants, public housing and retirement communities.

STANDARD FEATURES

- UL/cUL Listed for 3 hours fire rating
- UL 10C positive pressure
- BHMA Certified ANSI/BHMA A156.4 Grade-1
- Meets ADA ANSI A117.1 requirements
- Sized models: C5030 (3), C5040 (4), C5050 (5)
- Adjustable models: C5140 (1-4), C5150 (1-5), C5360 (3-6), C5160 (1-6)
- Cast aluminum body and forged steel arm
- Tri-packed for regular arm, top jamb and parallel arm mount
- Non handed installation
- Adjustable backcheck (BC)
- Adjustable sweep and latching speeds
- Self tapping and drilling screws
- Finishes: (ALUM) Aluminum, (DU) Duranodic, (BZ) Bronze, and (GLD) Gold
- Warranty: Limited 15 years

OPTIONAL FEATURES

- Full plastic cover
- Stainless steel cover (US32D)
- Hold open arm
- Cush stop arm
- Cush stop hold open arm
- Spring loaded cush arm
- Standard track arm
- Sex nuts and bolts
- Drop plates




CROSS REFERENCE

MAAX	CAL-ROYAL	DORMA	FALCON	HAGER	LCN	NORTON	SARGENT	YALE
C5000	300	7300/7400	SC60	5300	1260	1600	1130	51


Note: Chart prepared by comparing functions of door closers based on data obtained from trade sources. It is not guaranteed nor represented that any specific product exactly equals any other product.

INSTALLATIONS


Regular Arm-Pull Side




Top Jamb-Push Side



Parallel Arm-Push Side



DIMENSIONS

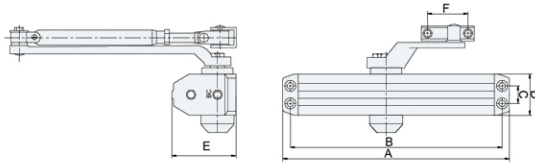

(A)	9 3/4" (248mm)
(B)	9 1/16" (230mm)
(C)	3/4" (19mm)
(D)	1 13/16" (46mm)
(E)	2 3/4" (70mm)
(F)	1 3/4" (44mm)

SELECTION GUIDE

Closer Size	Maximum Door Width				
	Regular & Top Jamb Arm			Parallel Arm	
	Interior Door	Exterior Door Inswing (Regular Arm)	Exterior Door Outswing (Top Jamb Arm)	Interior Door	Exterior Door
1	28" (711mm)				
2	36" (914mm)			30" (762mm)	
3	42" (1067mm)	30" (762mm)	36" (914mm)	36" (914mm)	30" (762mm)
4	48" (1219mm)	36" (914mm)	42" (1067mm)	42" (1067mm)	36" (914mm)
5	54" (1372mm)	42" (1067mm)	48" (1219mm)	48" (1219mm)	42" (1067mm)
6	60" (1524mm)	48" (1219mm)	54" (1372mm)	54" (1372mm)	48" (1219mm)

ARMS AND DROP PLATES

5000-FHO	Friction Hold Open Arm	Non-handed hold open arm, provided with parallel arm bracket				
5000-CSA	Cush Stop Arm	Rigid parallel arm stopper, forged steel, non-handed with dead stop built into soffit shoe				
5000-CSHO	Cush Stop Hold Open Arm	Rigid parallel arm stopper with hold open, forged steel, non-handed with dead stop built into soffit shoe				
5000-T/TH	Track Arm Non-Hold Open Track Arm with Hold Open	Standard track arm: Stamped steel, non-handed Track: Extruded aluminum, non-hold open (T), or with hold open (TH)	5000-FHO	5000-CSA	5000-CSHO	5000-T/TH
5000-DPRA	Door Plate - Regular Arm	For hinge side mount, 2-9/16" Height				
5000-DPTJ	Door Plate - Top Jamb	For top jamb mount, 2-9/16" Height				
5000-DPPA	Door Plate - Parallel Arm	For PA mount, 3-1/2" Height				
5000-MC	Metal Cover	5000-MC-US32D Satin stainless steel	5000-DPRA	5000-DPTJ	5000-DPPA	5000-MC