

C7000 Door Closer



MAAX C7000 Series heavy duty door closers offer the perfect combination of reliability, appearance, and durability in today's market. This closer is ideal for facilities that demand superior performance in high traffic environments. Choose the C7000 closer for interior and exterior doors in commercial and institutional buildings such as banks, restaurants, hotels, conference buildings, courthouses and medical facilities.

STANDARD FEATURES

- UL/cUL Listed for 3 hours fire rating
- UL 10C positive pressure
- BHMA Certified ANSI/BHMA A156.4 Grade-1
- Meets ADA ANSI A117.1 requirements
- Adjustable sizes 1-6
- Cast aluminum body and forged steel arm
- Tri-packed for regular arm, top jamb and parallel arm mount
- Non handed installation
- Adjustable backcheck (BC)
- Adjustable sweep and latching speeds
- Full plastic cover
- Self tapping and drilling screws, sex nuts and bolts
- Finishes: (ALUM) Aluminum, (DU) Duranodic, (BZ) Bronze, and (GLD) Gold
- Warranty: Limited 15 years

OPTIONAL FEATURES

- Delayed action (DA)
- Plated metal cover (US3,US26)
- Stainless steel cover (US32D)
- Plated arm (US3, US26)
- Hold open arm
- Cush stop arm
- Cush stop hold open arm
- Spring loaded cush arm
- Standard track arm
- Drop plates




CROSS REFERENCE

MAAX	CAL-ROYAL	DORMA	FALCON	HAGER	LCN	NORTON	SARGENT	YALE
C7000	900	8600FC	SC80FC	5200FC	1460	8500	1430	3500

Note: Chart prepared by comparing functions of door closers based on data obtained from trade sources. It is not guaranteed nor represented that any specific product exactly equals any other product.

INSTALLATIONS

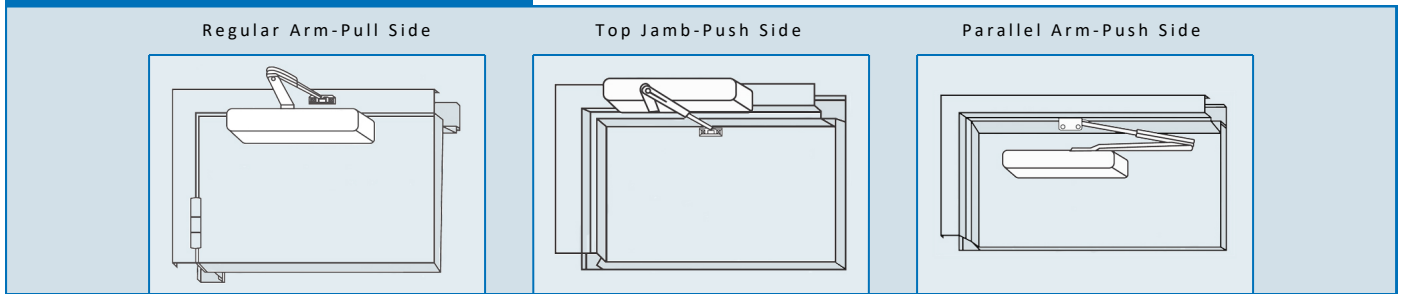

DIMENSIONS

	(A)	11 7/8" (302mm)
	(B)	11 1/8" (282.5mm)
	(C)	3/4" (19mm)
	(D)	2" (51mm)
	(E)	2 3/8" (60mm)
	(F)	1 3/4" (44mm)

SELECTION GUIDE

Closer Size	Maximum Door Width				
	Regular & Top Jamb Arm			Parallel Arm	
	Interior Door	Exterior Door Inswing (Regular Arm)	Exterior Door Outswing (Top Jamb Arm)	Interior Door	Exterior Door
1	28" (711mm)				
2	36" (914mm)			30" (762mm)	
3	42" (1067mm)	30" (762mm)	36" (914mm)	36" (914mm)	30" (762mm)
4	48" (1219mm)	36" (914mm)	42" (1067mm)	42" (1067mm)	36" (914mm)
5	54" (1372mm)	42" (1067mm)	48" (1219mm)	48" (1219mm)	42" (1067mm)
6	60" (1524mm)	48" (1219mm)	54" (1372mm)	54" (1372mm)	48" (1219mm)

ARMS AND DROP PLATES

7000-FHO	Friction Hold Open Arm	Non-handed hold open arm, provided with parallel arm bracket				
7000-CSA	Cush Stop Arm	Rigid parallel arm stopper, forged steel, non-handed with dead stop built into soffit shoe				
7000-CSHO	Cush Stop Hold Open Arm	Rigid parallel arm stopper with hold open, forged steel, non-handed with dead stop built into soffit shoe				
7000-T/TH	Track Arm Non-Hold Open Track Arm with Hold Open	Standard track arm: Stamped steel, non-handed Track: Extruded aluminum, non-hold open (T), or with hold open (TH)				
7000-DPPA	Door Plate - Regular Arm	For hinge side mount, 2" Height				
7000-DPTJ	Door Plate - Top Jamb	For top jamb mount, 2" Height				
7000-DPPA	Door Plate - Parallel Arm	For PA mount, 3-9/16" Height	7000-DPRA	7000-DPTJ	7000-DPPA	7000-MC
7000-MC	Metal Cover	7000-MC-US3 Polished brass on steel 7000-MC-US26D Polished chromium on steel 7000-MC-US32D Satin stainless steel				