


C2100 Door Closer

ADJ Model:
C2124

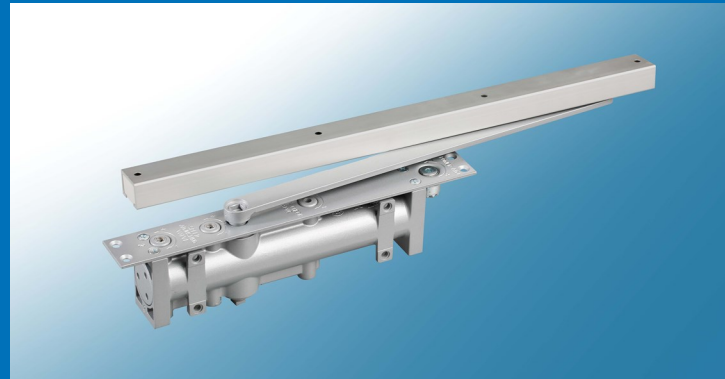

MAAX C2100 Series door closer offers smooth, durable and reliable operation for openings where a concealed type door closer is required for aesthetic and security installations. The C2100 closer offers compact design and is ideal for large size doors in commercial and residential applications.

STANDARD FEATURES


- UL/cUL Listed for 3 hours fire rating
- UL 10C positive pressure
- Adjustable model: C2124 (ADJ 2-4)
- Aluminum body and sliding arm track
- Rack and pinion mechanism
- Needle bearing for high efficiency
- Closer body can be concealed in door or in the frame head
- Non handed installation
- Maximum opening 160° (size 2 to 4)
- Door thickness 1 3/4" (44mm) minimum
- Adjustable sweep and latching speeds
- Finish: (ALUM) Aluminum
- Warranty: Limited 5 years

OPTIONAL FEATURES

- Backcheck (BC)
- Hold open track (for non fire rated doors)




DIMENSIONS

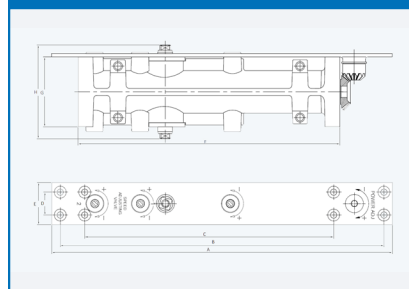

(A)	11 3/4" (230mm)
(B)	11 3/16" (285mm)
(C)	8 5/8" (219mm)
(D)	3/4" (20mm)
(E)	1 1/2" (37mm)
(F)	9 1/16" (230mm)
(G)	2 3/8" (61mm)
(H)	3 1/4" (82mm)

INSTALLATIONS

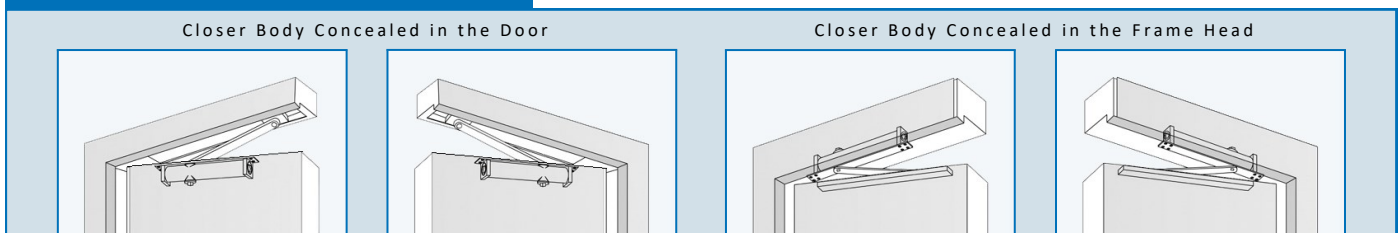

SELECTION GUIDE

Closer Size	Maximum Door Width			Maximum Door Weight
	Interior Door	Exterior Door (Inswing)	Exterior Door (Outswing)	
2	34" (864mm)	N/A	N/A	25-45 (KGS)
3	40" (1016mm)	30" (762mm)	36" (914mm)	45-65 (KGS)
4	46" (1168mm)	36" (914mm)	42" (1067mm)	65-85 (KGS)