

C2300 Door Closer

**ADJ Model:
C2324**



MAAX C2300 Series door closer provides the optimum reliable solution for openings where a concealed type door closer is required for aesthetic and security installations. The efficient cam-action design provides maximum closing force at the latch position while offering much lower opening resistance which makes the door very easy to open. The C2300 closer offers compact design and is ideal for large sized door openings in commercial and residential applications.

STANDARD FEATURES

- UL/cUL Listed for 3 hours fire rating
- UL 10C positive pressure
- Adjustable model: C2324 (ADJ 2-4)
- Aluminum body and sliding arm track
- Efficient cam and roller design
- Closer body can be concealed in door or in the frame head
- Non handed installation
- Maximum opening 120° (size 2) to 110° (size 4)
- Door thickness 1 3/4" (44mm) minimum
- Adjustable sweep and latching speeds
- Adjustable backcheck (BC)
- Finish: (ALUM) Aluminum
- Warranty: Limited 5 years

OPTIONAL FEATURES


- Hold open track (for non fire rated doors)



DIMENSIONS

(A)	13 5/16" (338mm)
(B)	12 5/8" (320mm)
(C)	17 5/16" (440mm)
(D)	3/4" (20mm)
(E)	1 5/16" (33mm)
(F)	9 7/16" (240mm)
(G)	1 13/16" (46mm)
(H)	3 1/32" (77mm)

INSTALLATIONS

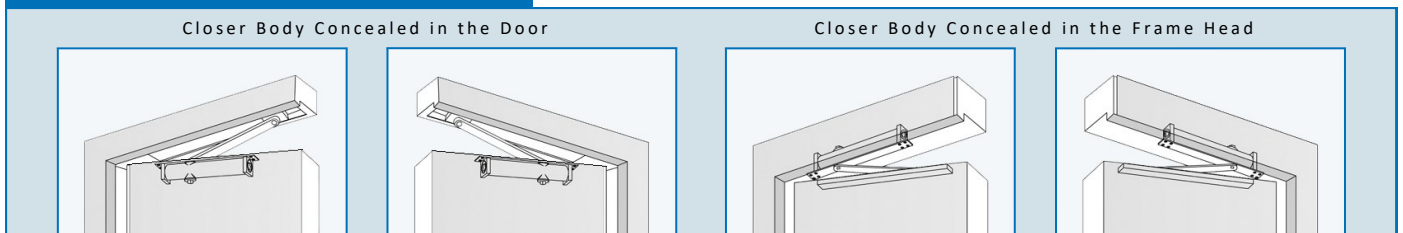

SELECTION GUIDE

Closer Size	Maximum Door Width			Maximum Door Weight
	Interior Door	Exterior Door (Inswing)	Exterior Door (Outswing)	
2	34" (864mm)	N/A	N/A	25-45 (KGS)
3	40" (1016mm)	30" (762mm)	36" (914mm)	45-65 (KGS)
4	46" (1168mm)	36" (914mm)	42" (1067mm)	65-85 (KGS)